


CATGUT

CHROM



Type	Twisted multifilament with a monofilament appearance
Composition	Strands of purified collagen taken from the serosal layer of selected bovines, tanned with chrome salts. Origin from BSE-free classified countries.
Coating	None
Colour	Dark brown
Tissue reaction	Moderate
Absorption	By phagocytosis. The rate of absorption is slowed down by chromizing. Complete mass absorption in approximately 90 days. Approximately 50% of tensile strength remain after 14 days. When used in infected tissues or in tissues with increased levels of proteolytic enzymes (stomach, cervix, vagina) it is more quickly absorbed.
Presentation	Box with 12 sutures; Cassette



*For quality
&
safety*

smi

www.sutures.be

CATGUT

CHROM

CHARACTERISTICS

- High tensile strength
- Absorption by phagocytosis
- Twisted structure

- Uniform diameter by centerless polishing (monofilament appearance)

- Hermetically sealed packing

BENEFITS

- Excellent tissue support
- Uniform absorption
- Excellent handling properties
- High flexibility
- High tensile strength
- Excellent knot security


- Soft passage through the tissues without sawing, tissue drag and trauma
- Excellent knot tie down

- Guaranteed seal and product sterility


INDICATIONS General soft tissue closing and/or ligation especially in
General surgery
Gastrointestinal surgery
Gynaecology
Obstetrics
Urology
Ophthalmic surgery

CONTRAINDICATIONS Cardiovascular surgery
Neurosurgery
Being absorbable not to use when an extended wound support is required.
Caution in patients with delayed wound healing (e.g. compromised immune system).
In the region of infected wounds
Known sensitivities or allergies to collagen or chromium

TENSILE STRENGTH

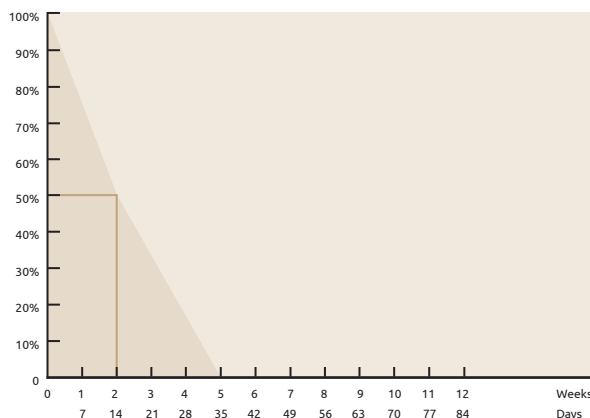

ABSORPTION



CATGUT

CHROM



Without needle

Metric USP Length Order number

2	4/0	150 cm	<i>brown</i>	2200015
3	3/0	150 cm	<i>brown</i>	2300015
3.5	2/0	150 cm	<i>brown</i>	2350015
4	0	150 cm	<i>brown</i>	2400015
5	1	150 cm	<i>brown</i>	2500015
6	2	150 cm	<i>brown</i>	2600015
7	3	150 cm	<i>brown</i>	2700015
8	4	150 cm	<i>brown</i>	2800015
10	6	150 cm	<i>brown</i>	21000015



Round bodied taper point

Metric USP Length Order number







1/2 circle










HR 15 mm		1	6/0	75 cm	<i>brown</i>	2100115
		1.5	5/0	75 cm	<i>brown</i>	2150115
		2	4/0	75 cm	<i>brown</i>	2200115
HR 20 mm		1.5	5/0	75 cm	<i>brown</i>	2150120
		2	4/0	75 cm	<i>brown</i>	2200120
		3	3/0	75 cm	<i>brown</i>	2300120
		3.5	2/0	75 cm	<i>brown</i>	2350120
		4	0	75 cm	<i>brown</i>	2400120
HR 26 mm		1.5	5/0	75 cm	<i>brown</i>	2150126
		2	4/0	75 cm	<i>brown</i>	2200126
		3	3/0	75 cm	<i>brown</i>	2300126
		3.5	2/0	75 cm	<i>brown</i>	2350126
		4	0	75 cm	<i>brown</i>	2400126
		5	1	75 cm	<i>brown</i>	2500126
HR 30 mm		2	4/0	75 cm	<i>brown</i>	2200130
		3	3/0	75 cm	<i>brown</i>	2300130
		3.5	2/0	75 cm	<i>brown</i>	2350130
		4	0	75 cm	<i>brown</i>	2400130
		5	1	75 cm	<i>brown</i>	2500130
HR 37 mm		2	4/0	75 cm	<i>brown</i>	2200137
		3	3/0	75 cm	<i>brown</i>	2300137
		3.5	2/0	75 cm	<i>brown</i>	2350137
		4	0	75 cm	<i>brown</i>	2400137
		5	1	75 cm	<i>brown</i>	2500137










smi




www.sutures.be

 Round bodied taper point	Metric	USP	Length	Order number
 HR 40 mm  HR 45 mm  HR 48 mm  HR 50 mm 	3.5	2/0	75 cm	<i>brown</i> 2350140
	4	0	75 cm	<i>brown</i> 2400140
	5	1	75 cm	<i>brown</i> 2500140
	5	1	90 cm	<i>brown</i> 2500140-90
	6	2	75 cm	<i>brown</i> 2600140
	4	0	75 cm	<i>brown</i> 2400145
	6	2	75 cm	<i>brown</i> 2600145
	5	1	75 cm	<i>brown</i> 2500148
	6	2	75 cm	<i>brown</i> 2600150
	6	2	90 cm	<i>brown</i> 2600150-90

 Round bodied taper point reverse cutting double armed	Metric	USP	Length	Order number
 HR 37 mm  HS 37 mm 	3.5	2/0	150 cm	<i>brown</i> 2350137-1437

 Blunt	Metric	USP	Length	Order number
 DRB 63 mm 	5	1	75 cm	<i>brown</i> 2501963

 Reverse cutting		Metric	USP	Length		Order number
	DS 12 mm 	1	6/0	45 cm	<i>brown</i>	2101512
		1.5	5/0	45 cm	<i>brown</i>	2151512
	DS 16 mm 	1.5	5/0	75 cm	<i>brown</i>	2151516
		2	4/0	75 cm	<i>brown</i>	2201516
	DS 19 mm 	1.5	5/0	75 cm	<i>brown</i>	2151519
		2	4/0	75 cm	<i>brown</i>	2201519
		3	3/0	75 cm	<i>brown</i>	2301519
	DS 24 mm 	3.5	2/0	75 cm	<i>brown</i>	2351519
		2	4/0	75 cm	<i>brown</i>	2201524
		3	3/0	75 cm	<i>brown</i>	2301524
	DS 30 mm 	3.5	2/0	75 cm	<i>brown</i>	2351524
		4	0	75 cm	<i>brown</i>	2401524
		5	1	75 cm	<i>brown</i>	2501524
	DS 37 mm 	3	3/0	75 cm	<i>brown</i>	2301530
		3.5	2/0	75 cm	<i>brown</i>	2351530
		4	0	75 cm	<i>brown</i>	2401530
	DS 40 mm 	5	1	75 cm	<i>brown</i>	2501530
		3	3/0	75 cm	<i>brown</i>	2301537
3.5		2/0	75 cm	<i>brown</i>	2351537	
		4	0	75 cm	<i>brown</i>	2401537
		5	1	75 cm	<i>brown</i>	2501537
		3.5	2/0	75 cm	<i>brown</i>	2351540
		6	2	75 cm	<i>brown</i>	2601540
		7	3	75 cm	<i>brown</i>	2701540

 Reverse cutting		Metric	USP	Length		Order number
	HS 37 mm 	4	0	75 cm	<i>brown</i>	2401437
		5	1	75 cm	<i>brown</i>	2501437

CATGUT

CHROM

IN CASSETTES

Metric	USP	Length	Order number
1.5	5/0	100 m	2015
2	4/0	100 m	2020
2	4/0	50 m	20205
3	3/0	100 m	2030
3	3/0	50 m	20305
3.5	2/0	100 m	2035
3.5	2/0	50 m	20355
4	0	100 m	2040
4	0	75 m	20407
4	0	50 m	20405
5	1	75 m	2050
5	1	50 m	20505
6	2	50 m	2060
7	3	50 m	2070
8	4	30 m	2080
8	4	25 m	20802
9	5	30 m	2090
10	6	30 m	2100

